



INSTALLATION INSTRUCTIONS FOR:

Sealed Low Bay Series Pole Mount

Revision 1




CAUTION:

1. TURN OFF ALL POWER TO POLE BEFORE SERVICING
2. ONLY QUALIFIED PERSONNEL SHOULD PERFORM INSTALLATION OR SERVICING OF FIXTURES

REMOVING PREVIOUS FIXTURE

- A. Remove previous light fixture to prepare for installation of new Relume fixture. Make sure not to use any old hardware from previous fixture as we cannot ensure that it will work properly with the new light fixture.
- B. Check wiring that goes from the mounting pole to the fixture to ensure that it is not damaged or frayed. Make sure wiring is restriped to ensure a good contact for connections.



MOUNTING ARM PREPARATION

- A. Remove the light fixture and mounting arm from their boxes. Check to make sure the fixture is equipped with all necessary hardware and the arm is also supplied with its necessary hardware. (See Fig 7.)
- B. Remove the back plate from the fixture (see Fig 2) so that it can be attached to the mounting arm (see Fig 3). This will aid in the final installation of the fixture and allow the fixture to hang from the tabs on the back plate to fasten the tether strap and allow the installer to finish wiring the fixture.

FIG 2


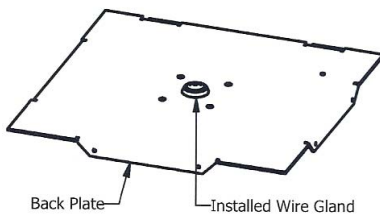


FIG 3



THIS LED FIXTURE IS A HIGHLY ADVANCED, ENERGY EFFICIENT PRODUCT THAT WILL PROVIDE THE END USER WITH YEARS OF DEPENDABLE SERVICE. IT WILL DO SO ONLY IF INSTALLED PROPERLY IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND OR LOCAL CODE SPECIFICATIONS. FAILURE TO ADHERE TO THESE CODES AND RESTRICTIONS MAY RESULT IN SERIOUS INJURY, DAMAGE TO ADJACENT EQUIPMENT, FIXTURE AND OR POWER SUPPLY AND WILL VOID THE WARRANTY. THE INSTALLATION INSTRUCTIONS DO NOT SUPPORT ALL DETAILS OR VARIATIONS IN EQUIPMENT, NOR DO THEY PROVIDE FOR ALL POSSIBLE CONTINGENCIES RELATED TO THE INSTALLATION, SERVICE OR MOUNTING SITUATION. SHOULD SPECIFIC PROBLEMS OCCUR THAT ARE NOT COVERED BY THE ATTACHED INSTALLATION INSTRUCTIONS, PLEASE CONTACT YOUR SALES REPRESENTATIVE OR DISTRIBUTOR FOR ASSISTANCE. RETAIN THESE INSTALLATION INSTRUCTIONS FOR FUTURE USE. DO NOT MODIFY THIS LIGHTING DEVICE FOR ANY REASON. THESE DEVICES HAVE BEEN DESIGNED FOR MAXIMUM PERFORMANCE AND EASE OF INSTALLATION. ANY MODIFICATIONS WILL VOID THE WARRANTY.

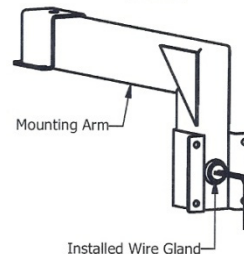

INSTALLATION INSTRUCTIONS FOR:

Sealed Low Bay Series Pole Mount

Revision 1



CAUTION:

1. TURN OFF ALL POWER TO POLE BEFORE SERVICING
2. ONLY QUALIFIED PERSONNEL SHOULD PERFORM INSTALLATION OR SERVICING OF FIXTURES

- C. Place one (1) wire gland in the hole in the rear of the mounting arm (See Fig 3). This is to ensure no water will enter into the arm or through the back plate and cause a potential failure for the fixture.
- D. Feed wire from back plate through mounting arm and through wire gland.
- E. Fasten back plate to mounting arm with the supplied hardware. Tighten bolts down with provided lock nuts.
- F. Install the adapter plate onto the pole with the provided hardware (see Fig 5). Some applications may not have the same holes or any holes, so some drilling may be required to adapt the adapter plate to the pole. Once the adapter plate is attached, the wiring can be finished between the mounting arm and the pole.

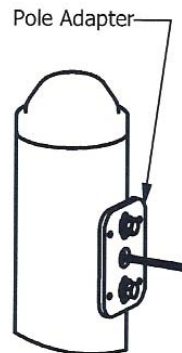


FIG 5



THIS LED FIXTURE IS A HIGHLY ADVANCED, ENERGY EFFICIENT PRODUCT THAT WILL PROVIDE THE END USER WITH YEARS OF DEPENDABLE SERVICE. IT WILL DO SO ONLY IF INSTALLED PROPERLY IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND OR LOCAL CODE SPECIFICATIONS. FAILURE TO ADHERE TO THESE CODES AND RESTRICTIONS MAY RESULT IN SERIOUS INJURY, DAMAGE TO ADJACENT EQUIPMENT, FIXTURE AND OR POWER SUPPLY AND WILL VOID THE WARRANTY. THE INSTALLATION INSTRUCTIONS DO NOT SUPPORT ALL DETAILS OR VARIATIONS IN EQUIPMENT, NOR DO THEY PROVIDE FOR ALL POSSIBLE CONTINGENCIES RELATED TO THE INSTALLATION, SERVICE OR MOUNTING SITUATION. SHOULD SPECIFIC PROBLEMS OCCUR THAT ARE NOT COVERED BY THE ATTACHED INSTALLATION INSTRUCTIONS, PLEASE CONTACT YOUR SALES REPRESENTATIVE OR DISTRIBUTOR FOR ASSISTANCE. RETAIN THESE INSTALLATION INSTRUCTIONS FOR FUTURE USE. DO NOT MODIFY THIS LIGHTING DEVICE FOR ANY REASON. THESE DEVICES HAVE BEEN DESIGNED FOR MAXIMUM PERFORMANCE AND EASE OF INSTALLATION, ANY MODIFICATIONS WILL VOID THE WARRANTY.



INSTALLATION INSTRUCTIONS FOR:

Sealed Low Bay Series Pole Mount

Revision 1




CAUTION:

1. TURN OFF ALL POWER TO POLE BEFORE SERVICING
2. ONLY QUALIFIED PERSONNEL SHOULD PERFORM INSTALLATION OR SERVICING OF FIXTURES

- G. Attach the power supply and the pole wiring by attaching the Neutral (white) to the white; Line (black) to black; and Ground (green) to green using wire nuts (not furnished).
- H. Once all electrical connections have been made, the fixture can now be attached. (See fig 6) Hang the light fixture from the back plate by hooking the light over the hooks on the back plate. Attach the security tether from the light to the back plate and install and tighten the wing nut onto the stud.

FIG 6

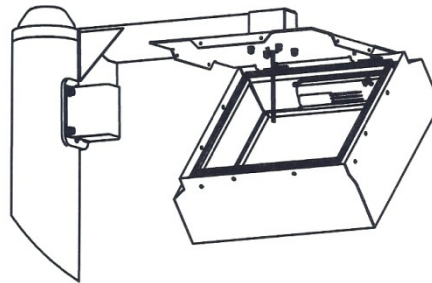

- I. Pivot the light fixture into final mounting position and push the light fixture tightly against back plate to line up fastener holes. Attach the light fixture to the mounted back plate by installing the supplied mounting screws through the attachment holes located on three (3) sides of the light fixture. Torque machine screws to 23 in./lbs.
- J. Once installation is completed, remove plastic protective sheet from the outer lens.
- K. Power can now be restored to fixture.



THIS LED FIXTURE IS A HIGHLY ADVANCED, ENERGY EFFICIENT PRODUCT THAT WILL PROVIDE THE END USER WITH YEARS OF DEPENDABLE SERVICE. IT WILL DO SO ONLY IF INSTALLED PROPERLY IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND OR LOCAL CODE SPECIFICATIONS. FAILURE TO ADHERE TO THESE CODES AND RESTRICTIONS MAY RESULT IN SERIOUS INJURY, DAMAGE TO ADJACENT EQUIPMENT, FIXTURE AND OR POWER SUPPLY AND WILL VOID THE WARRANTY. THE INSTALLATION INSTRUCTIONS DO NOT SUPPORT ALL DETAILS OR VARIATIONS IN EQUIPMENT, NOR DO THEY PROVIDE FOR ALL POSSIBLE CONTINGENCIES RELATED TO THE INSTALLATION, SERVICE OR MOUNTING SITUATION. SHOULD SPECIFIC PROBLEMS OCCUR THAT ARE NOT COVERED BY THE ATTACHED INSTALLATION INSTRUCTIONS, PLEASE CONTACT YOUR SALES REPRESENTATIVE OR DISTRIBUTOR FOR ASSISTANCE. RETAIN THESE INSTALLATION INSTRUCTIONS FOR FUTURE USE. DO NOT MODIFY THIS LIGHTING DEVICE FOR ANY REASON. THESE DEVICES HAVE BEEN DESIGNED FOR MAXIMUM PERFORMANCE AND EASE OF INSTALLATION, ANY MODIFICATIONS WILL VOID THE WARRANTY.



INSTALLATION INSTRUCTIONS FOR:


Sealed Low Bay Series Pole Mount

Revision 1



CAUTION:

1. TURN OFF ALL POWER TO POLE BEFORE SERVICING
2. ONLY QUALIFIED PERSONNEL SHOULD PERFORM INSTALLATION OR SERVICING OF FIXTURES

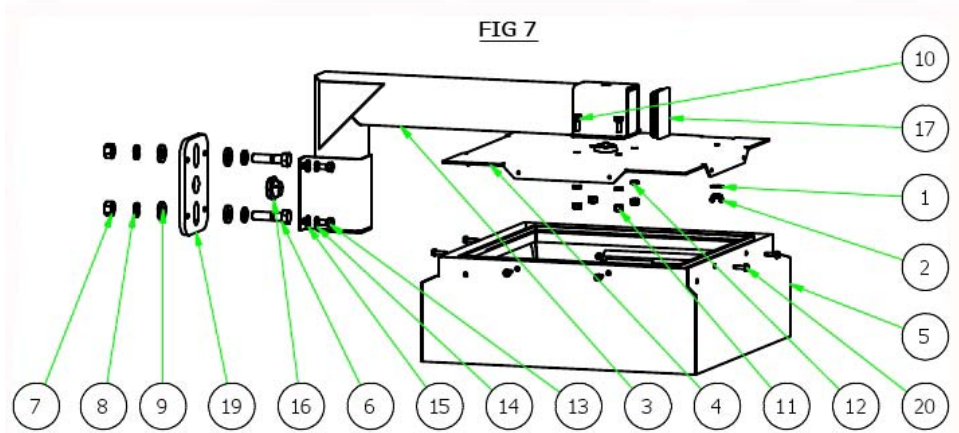

PS Series Parts List		
ITEM	QTY	DESCRIPTION
1	1	#8 External Tooth Lock Washer
2	1	8-32 Zinc Plated Wing Nut
3	1	PS Series Pole Mount Arm
4	1	PS Series Pole Mount Back Plate
5	1	PS Series Light Fixture
6	2	1/2" x 2" Hex Bolt
7	4	1/2" Hex Nut
8	4	1/2" Lock Washer
9	4	1/2" Flat Washer
10	4	1/4" - 20 x 3/4" Hex Bolt
11	4	1/4" - 20 Nylock Nut
12	4	1/4" Sealing Washer
13	4	5/16" - 18 x 5/8" Hex Bolt
14	4	5/16" Lock Washer
15	4	5/16" Flat Washer
16	2	Richco Wire Gland
17	2	2" x 3" Push In Rectangular Tube Plug
18	1	60" SJOOW Cord .31" OD 18-3 GA (NOT SHOWN)
19	1	Pole Mount Adapter Plate
20	6/8	10-24 x 3/4" Hex Washer Head Screw



THIS LED FIXTURE IS A HIGHLY ADVANCED, ENERGY EFFICIENT PRODUCT THAT WILL PROVIDE THE END USER WITH YEARS OF DEPENDABLE SERVICE. IT WILL DO SO ONLY IF INSTALLED PROPERLY IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND OR LOCAL CODE SPECIFICATIONS. FAILURE TO ADHERE TO THESE CODES AND RESTRICTIONS MAY RESULT IN SERIOUS INJURY, DAMAGE TO ADJACENT EQUIPMENT, FIXTURE AND OR POWER SUPPLY AND WILL VOID THE WARRANTY. THE INSTALLATION INSTRUCTIONS DO NOT SUPPORT ALL DETAILS OR VARIATIONS IN EQUIPMENT, NOR DO THEY PROVIDE FOR ALL POSSIBLE CONTINGENCIES RELATED TO THE INSTALLATION, SERVICE OR MOUNTING SITUATION. SHOULD SPECIFIC PROBLEMS OCCUR THAT ARE NOT COVERED BY THE ATTACHED INSTALLATION INSTRUCTIONS, PLEASE CONTACT YOUR SALES REPRESENTATIVE OR DISTRIBUTOR FOR ASSISTANCE. RETAIN THESE INSTALLATION INSTRUCTIONS FOR FUTURE USE. DO NOT MODIFY THIS LIGHTING DEVICE FOR ANY REASON. THESE DEVICES HAVE BEEN DESIGNED FOR MAXIMUM PERFORMANCE AND EASE OF INSTALLATION. ANY MODIFICATIONS WILL VOID THE WARRANTY.